**CREW CAB** 

# CANTER 816

**DUONIC AMT OR MANUAL** 





**GVM:** 7,500kg



Power/Torque: 110kW/370Nm



Wheelbase:

3,400mm (E) /3,850mm (G)

- Electronic Brake System NEW
- Electronic Stability Control NEW
- Active Emergency Braking System NEW ■
- Lane Departure Warning System NEW
- 5yr/200,000km warranty NEW
  - 30,000km service intervals



# **SPECIFICATIONS - CANTER 816 CREW CAB**

#### MODEL

 4X2 816
 WIDE CREW CAB
 6 SP.
 AMT
 FEB71ER3WFBC

 4X2 816
 WIDE CREW CAB
 6 SP.
 AMT
 FEB71GR3WFBC

 4X2 816
 WIDE CREW CAB
 5 SP.
 MAN
 FEB71GR4WFBC

#### WHEELBASE

3,400mm (E)

3,850mm (G)

3,850mm (G)

7,500kg (5,995kg) 7,500kg (5,995kg)

**GVM** (optional)

7,500kg (5,995kg)

#### GCM (optional)


11,000kg (9,500kg) 11,000kg (9,500kg) 11,000kg (9,500kg)

ENGINE	
Engine Version	FUSO 4P10-T4 Euro 5 Diesel
Configuration	4 Cyl. In-line DOHC, 4-Valve
Туре	Variable Geometry Turbo Charged Air to Air Intercooled
Displacement	3 litre (2998cc)
Power (DIN)	110kW @ 2840~3500rpm
Torque (DIN)	370Nm @ 1350~2840rpm
Maximum Engine Speed (rpm)	4100
Compression Ratio	17.5:1
Cooling System/Oil Cooler	Water cooled with Viscous fan, 14.8L capacity. Engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Cold Start Preheat	Standard
Emission Control	Diesel Particulate Filter (DPF) Exhaust Dash Display DPF Status 0~9 (Empty~Full)
	Parked Regeneration possible from 7~9

CLUTCH		
	DUONIC AMT	Manual
Clutch Model	DUONIC Automated Manual (no clutch pedal)	FUSO C4W30
Туре	Dual Clutch (Wet Multi-plate)	Single Dry Plate, Direct Hydraulic Type, 300mm

TRANSMISSION				
	DUONIC A	MT	Manual	
Version	FUSO DUC	FUSO DUONIC M038S6		38S5
Type/Speeds	6 Speed Automated Manual with Auto and Manual Modes		5 Speed wit Lever	h In-Dash Gearshift
Features	Virtually Instant Gear Changes In-Dash Gear Lever with Park Brake Position ECO Mode to Minimise Fuel Usage		Synchrome	sh 2nd-5th
Ratios	1st: 5.397 2nd: 3.788 3rd: 2.310 4th: 1.474	5th: 1.000 6th: 0.701 Rev. 5.397	1st: 5.494 2nd: 3.193 3rd: 1.689	4th: 1.000 5th: 0.723 Rev. 4.494
PTO Opening	LH Side		LH Side	-

1	D)	U-	ГΛ
_			



FRONT AXLE	
Axle Version	FUSO F350T "I" Beam
Design Capacity (kg)	3,100

Design Capacity (kg) 3,100

Max Operating Capacity (kg) 3,100

FRONT SUSPENSION

# Type Taper leaf spring with Stabiliser Bar and Double Acting Shock Absorbers Size (mm) 1,150 x 70

REAR SUSPENSION

REAR AXLE	
Axle	FUSO D035 Full Floating Banjo
Ratio	DUONIC 5.714:1 Manual 5.285:1
Design Capacity (kg)	6,000
Max Operating Capacity (kg)	6,000

FUEL	
Injection System	Bosch Common Rail Direct Injection Bosch Piezo Technology Injectors
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity (L)	100
Filtration	Filter with Water Separator and Indicator Sensor

# Type Steel Suspension Details Multi Leaf Spring with Stabiliser Bar and Double Acting Shock Absorbers Size Main Leaves (mm) 1,250 x 70 Size Helper Leaves (mm) 880 x 70 STEERING Power Assisted Tilt/Telescopic Adjustable Steering Wheel

<b>ELECTRICAL</b>	
Voltage	12V Negative Earth
Alternator Capacity	12V-110 amp
Battery Specification	Heavy Duty 115D31L x 2
Headlamp Type	Halogen 2 x 55W/60W
Fog lamp in bumper	Standard

BRAKES	
Туре	Hydraulic Dual Circuit with Front and Rear Twin Caliper Disc Brakes
Size Front/Rear (mm)	310 x 40
Features	ABS + EBD + EBS Exhaust Brake Brake Priority System
Park Brake	Transmission Mounted

## **SPECIFICATIONS - CANTER 816 CREW CAB**

# WHEELS AND TYRES Wheel Size 17.5 x 6.0-127 Tyre Size All 215/75R17.5 (Traction tyre on rear - FEB71ER3 and FEB71GR4)

#### **CHASSIS**

Spare Tyre Carrier

**Size (mm)** 192 x 60 x 6

Refer to the bodybuilders guidelines on the Fuso website (www.fuso.co.nz) before mounting a body or modifying the chassis

#### **INSTRUMENTS**

Gauges	Speedometer with Odometer; Tachometer Fuel Level; Water Temperature
Colour Information Display	Fuel Consumption, DPF Bar Chart from 1~9 Water Temperature, Maintenance Reminder System, Date and Time, Tripmeters x 2

#### STANDARD FEATURES

Cab Cooling and Heating	Air Conditioner / Heater / Demister
Accessory Power	12V Accessory Power Outlet / Cigar Lighter
Driving	Keyless Central Locking Electric Windows (front only)
Storage	Dual Overhead Storage Pockets, In-Dash Centre, Document Storage, Door Storage Pockets, Storage Under Rear Crew Seats

#### **CAB FEATURES**

Туре	All Steel Forward Control Fixed Cab
Mounting	6 Point Isolated Rubber
Colour	Natural White (W31)
Interior	Fully Trimmed cab with Vinyl Floor Covering
Seating Capacity	7
Seat (driver)	Heavy Duty Suspended with LH Arm Rest, Adjustable Lumbar Support and Weight Adjustment
Seats (front passengers)	Flat Folding, 2 Passenger Bench
Seats (crew cab rear)	Low Back Bench Seat

#### **SERVICE INTERVALS**

30,000km full service / 15,000km safety inspection

30,000km full service intervals, depending on application/use.

15,000km safety inspection, with greasing, required to maintain warranty cover and ensure optimum performance.

#### **WARRANTY**

4x2 616 Wide Crew Cab 5 Sp. MAN

5 years / 200,000km

Simply have your vehicle serviced at an authorised FUSO Service Centre, at the recommended servicing intervals, and you are covered by an additional 2 year/100,000km FUSO warranty on top of the first 3 years/100,000km. That's a total of 5 years/200,000km cover.

KERB WEIGHTS AND MAX AXLE LOADS (kg)

Refer to terms and conditions in the FUSO warranty booklet for full details.

#### **SAFETY FEATURES**

ACTIVE SAFETY FEATURES		
Electronic Brake System (EBS)	Yes	NEW
Electronic Stability Control (ESC)	Yes	NEW
Active Emergency Braking System (AEBS)	Yes	NEW
Lane Departure Warning System (LDWS)	Yes	NEW

### CAB

Structure	Side Intrusion Bar
Airbags	Driver's (steering wheel) Passenger's (dashboard) NEW
Seatbelts	ELR 3-Point (+ height-adjustable with pre tensioner for driver) Lap Belt (centre passenger)
Driver's Seat	Spring-suspended
Steering Wheel	Energy-absorbing Adjustable (height and reach)
Rearview Mirrors	Heated
Fog Lamps	Yes
Front Step Lights	Yes

7" Touchscreen Media Unit

AM/FM/DAB + USB + AUX NEW

Yes Yes

Apple CarPlay and Android Auto Wi-Fi enabled for Internet Radio Bluetooth; 32GB capacity storage HD Reverse Camera included †

ECE D 20 Dainforced Cab

#### **CHASSIS**

Front End Outline Marker Lights

Keyless Central Locking

Speed Limter	Yes (activated and adjustable by FUSO dealer)
Anti-Lock Braking System (ABS)	Yes
Anti-Slip Regulator (ASR)	Yes
Electronic Brake Force Distribution (EBD)	Yes
Disc Brakes	Auto-Adjusting, 4 Wheel Dual Caliper
Brake Priority System	Yes
Exhaust Brake	Yes
Hill Start Assist	Yes (adjustable engagement on manual transmission)
Reverse Warning Buzzer	Yes
Anti Roll Bar	Yes
Brake Wear Indicator	Yes

#### OPTIONS

† Additional Multimedia Display Cameras (up to 4)

Truck Specific GPS Navigation

Reversing Sensors

Tyre Pressure Monitoring System

Wireless Phone Charge Pocket

		· · · · · · · · · · · · · · · · · · ·						
		Vehicle Ratings**		Max Axle Loadings**		Kerb Weights*		
Model		GVM	GCM	Front	Rear	Front	Rear	Total
4x2 816 Wide Crew Cab 6 Sp. AMT	FEB71ER3WFBC	7,500	11,000	3,100	6,000	1,750	900	2,650
4x2 816 Wide Crew Cab 6 Sp. AMT	FEB71GR3WFBC	7,500	11,000	3,100	6,000	1,770	900	2,670
4x2 816 Wide Crew Cab 5 Sp. MAN	FEB71GR4WFBC	7,500	11,000	3,100	6,000	1,750	900	2,650
4x2 616 Wide Crew Cab 6 Sp. AMT	FEB71ER3WFBC(D)	5,995	9,500	3,100	6,000	1,750	900	2,650
4x2 616 Wide Crew Cab 6 Sp. AMT	FEB71GR3WFBC(D)	5,995	9,500	3,100	6,000	1,770	900	2,670

9,500

FEB71GR4WFBC(D)


<sup>\*</sup> Weights (est.) includes 10L fuel & spare wheel and are subject to 2.5% variation (+/-)


<sup>\*\*</sup> Vehicle ratings and max axle loadings may be limited by local regulations.

# **SPECIFICATIONS - CANTER 816 CREW CAB**

PERFORMANCE				
	DUONIC AMT	Manual		
Turning Circle (kerb to kerb -	metres) E = 12.2 G = 13	.6 G = 13.6		
Road Speed (km/h) at Max E Speed	ngine 127	130		
Engine Speed (rpm) at 90km (top gear)	/hr 2535	2420		
Gradeability at Rated GVM (theoretical)*	29%	29%		
	neoretical performance only under different conditions	v. Actual performance		

DIMENSIONS (mm)		
	E Wheelbase	G Wheelbase
Wheelbase	3,400	3,850
Length Overall	5,935	6,685
Height Overall	2,225	2,225
Width Overall	2,030	2,030
Width Rear Axle	2,030	2,030
Width Front Track	1,675	1,675
Width Rear Track	1,560	1,560
Width Frame	750	750
Height Frame at Rear Axle	795	794

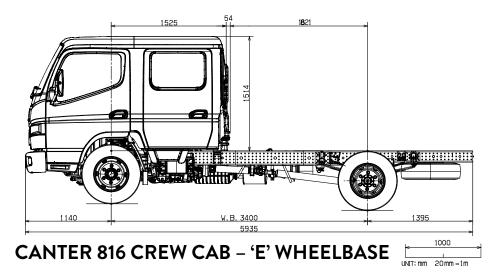

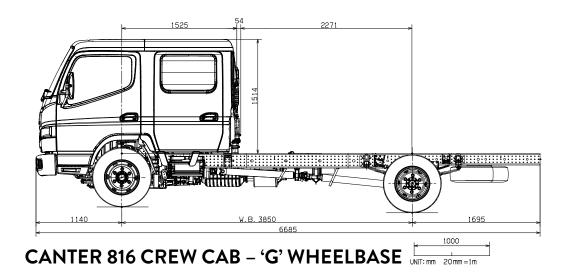

Scale = 1:50 (20mm = 1 metre). This scale is accurate when used on the original spec sheet, be aware that enlarging these illustrations can alter the scale and cause incorrect measurements. Fuso New Zealand and its authorised dealers always recommend customers seek professional advice from independent sources before commencing any engineering activities.

A policy of continual improvement means that specifications detailed in this brochure are subject to change without notice. Contact your authorised Fuso dealer to confirm current specifications. Fuso is a registered trademark of Mitsubishi Fuso Truck & Bus Corporation. Copyright © Fuso NZ (2021)

