## FIGHTER FK1025

**EURO 5 · 4x2 · MANUAL or AUTO** 









- 30,000km service intervals
- Isringhausen driver's seat
- **■** High-torque engine
- Park brake on rear axle



## **SPECIFICATIONS - FIGHTER FK1025 MWB**

### MODEL

4x2 FK1025 6 4x2 FK1025 5

6 SP. MA

MAN STEELS

**STEEL SUSP.** FK61FL1RFAC **STEEL SUSP.** FK61FL1RFAL

### WHEELBASE (mm)

5,210 (L) 5,210 (L)


### GVM (kg)

10,600 10,600 20,000

GCM (kg)

ENGINE	
Engine Version	FUSO 6M60-9AT1 Diesel
Configuration	6 Cyl. In-line OHC, 4-Valve
Туре	Variable Geometry Turbo Charged Air to Air Intercooler
Displacement	7.5 litre (7545cc)
Power ECE Nett	177kW @ 2500rpm
Torque ECE Nett	745Nm @1400rpm
Power (JIS Gross)*	184kW (250ps) @ 2500rpm
Torque (JIS Gross)*	761Nm (561lb/ft) @ 1400rpm
Maximum Engine Speed (rpm)	2900
Compression Ratio	16.0:1
Cooling System/Oil Cooler	Water cooled with Viscous fan, 23.0L capacity. Engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Cold Start Preheat	Standard
Emission Control	Selective Catalytic Reduction (SCR) after-treatment system (BlueTec), Positive Crankcase Ventilation (PCV)
Emission Level	EURO 5 (ADR 80/03)
*Calculated	

### 6M60-9AT1



# Injection System DENSO Common Rail System Electronically Controlled Direct Injection Tank Type Rectangular Steel Tank with Locking Cap Fuel Capacity (L) AdBlue Exhaust Fluid Capacity (L) 25

ELECTRICAL		
Voltage	24V Negative Earth	
Alternator Capacity	24V-80 amp	

ELECTRICAL	continued)
Battery Specification	Heavy Duty 2 x 12V, 100Ah/20hr
Headlamp Type	Halogen 2×70W/75W
CLUTCH	
	Manual
Clutch Model	FUSO C7M38
Туре	Single Plate Cerametallic 380mm
Operation/Specification	Air Assisted Hydraulic

TRANS	MISSION			
	Manual		Auto	
Version	FUSO Manua	al M070S6-OD	Allison Autor Series	matic 2500
Type/Speeds	6 with Air Ass	sisted Gearshift	5 Speed with Economy Mo	
Features	Synchromesh	2nd-6th	Generation 5 Systems	Control
Ratios	1st: 6.807 2nd: 4.172 3rd: 2.396 4th: 1.504	5th: 1.000 6th: 0.774 Rev. 6.807	1st: 3.512 2nd: 1.896 3rd: 1.439	4th: 1.000 5th 0.737 Rev. 5.086
PTO Opening	LH Side		LH and RH S	Side
Torque Convertor/Stall Torque Ratio	N/A		TC222/1.58	
Automatic Transmission Fluid Cooling	N/A		Cooler mour radiator	ited in front of

Fluid Cooling	
PROPELLER SHAFT	
Туре	P10
Universal Joint	Needle Roller
FRONT AXLE	
Axle	FUSO F400T "I" Beam
Design Capacity (kg)	3,800
Max Operating Capacity (kg)	3,800

I KOMI 303I ENSION	
Туре	Taper Leaf Spring with Stabiliser Bar and Double Acting Shock Absorbers
Size (mm)	1,300 x 70

FUSO D052 Full Floating Hypoid
9,500
7,000
4.444:1

REAR SUSPENSION	
Туре	Steel Suspension
Details	Multi Leaf Spring with Stabiliser Bar
Size Main Leaves (mm)	1,300 x 70
Size Helper Leaves (mm)	900 x 70

### **SPECIFICATIONS - FIGHTER FK1025 MWB**

# STEERING Power Assisted Tilt/Telescopic Adjustable Steering Wheel BRAKES

BRAKES	
Туре	Air Actuated Hydraulic Dual Circuit with Automatic Brake Adjustment and ABS
ASR (Traction Control)	N/A
Size Front / Rear (mm)	320 x 120 / 320 x 140
Park Brake	Rear Wheel Spring Actuated
Auxiliary	Exhaust Brake
Compressor	Water Cooled, 340cc Single Cylinder with Air Dryer

WHEELS AND TYRES	
Wheel Type	7, Single Piece Disc
Wheel Size	17.5x6.75DC-131-10t
Wheel Stud Pattern	6 stud 222.25mm PCD
Tyre Size All	235/75R17.5
Spare Tyre Carrier	Provided

CHASSIS		
Туре	Parallel Channel	
Size (mm)	228 x 80 x 7.0	
Width (mm)	842	

Refer to the bodybuilders guidelines on the Fuso website (www.fuso.co.nz) before mounting a body or modifying the chassis

### **INSTRUMENTS**

Gauges	Speedometer with Odometer, Tachometer, Air Pressure (2), Fuel Level, Water Temperature
Colour Information	Fuel Consumption, Service Indicators,
Display	Hour Meter and Tripmeter

STAI	NDAR	D FEA	TURES

Airbag	Driver's Air Bag and Seat Belt Pre-tensioner
Hill Start System	Yes (Not available on auto model)
Cab Cooling and Heating	Air Conditioner/Heater/Demister
Accessory Power	24V Accessory Power Outlet/Cigar Lighter
Audio	AM/FM + USB + Bluetooth Hands Free
Driving	Central Locking, Electric Windows, Cruise Control, LH Transom Window, Cup Holders (4), Rear Quarter Glass, Fluorescent Cabin Lamp and Interior Reading Lamps, Engine Idle Speed Control
Storage	Centre Seat Storage Console, Rear Bunk Storage Pocket, Dash Storage Tray 2 DIN Glove Compartment, 1 Single and 1 Double DIN Slot for Accessories, Overhead Storage Pocket with Lid, RH Door Storage Pocket
Cab: External	Roof Mounting Points (max. static load 70kg) Front End-Outline Marker Lamps

### **STANDARD FEATURES** (continued)

Chassis Chassis Mounted Tool Box Reverse Warning Buzzer

CAB FEATU	RES
Туре	All Steel Forward Control Manual Tilt 44 deg.
Mounting	Hydroelastic Susp. 4 Point
Colour	Natural White (W31)
Interior	Fully Trimmed
Windscreen	Laminated Tinted
Windscreen Wipers	2 Speed + Intermittent Cycle with Integrated Washer Nozzles
Door	90 degree Opening Angle
Rear Vision Mirrors	Remote/Heated with Convex Spotter (Both Sides)
Seating Capacity	3
Seat Belts	2 ELR Lap Sash, 1 Lap
Seat (driver)	ISRI Air Suspension with Auto Levelling, Height, Tilt, Lumbar, bolster and Dampening Adjustment, Integral Headrest and Fabric Trim
Seats (passenger)	Centre: Low Back with Fabric Trim and forward folding, LH Passenger: Fixed Base with Reclining Seat Back, Integral Headrest and Fabric Trim

### SERVICE INTERVALS

30,000km full service / 15,000km safety inspection

30,000km full service intervals, depending on application/use. 15,000km safety inspection, with greasing, required to maintain warranty cover and ensure optimum performance.

### WARRANTY

3 years / 150,000km

Refer to terms and conditions in the FUSO warranty booklet for full details.

### **OPTIONS**

6.2" Touchscreen Media Unit AM/FM/DAB + USB + AUX, Apple CarPlay and Android Auto, Wi-Fi enabled for internet radio, Bluetooth, 32GB storage capacity, HD Reverse Camera included Additional cameras for Media Unit (up to 4) Truck Specific GPS Navigation

Reverse Sensors

Tyre Pressure Monitoring System (up to 36 tyres) Wireless Phone Charging Pocket

Extended Warranty: Ădditional 2yrs / 150,000km

# PERFORMANCE Manual Auto Turning Circle (kerb to kerb - metres) 16.6 16.6 Electronically Speed Limited to (km/h): 100km/hr 100km/hr Engine Speed (rpm) at 90km/hr (top gear) 2090 1995 Gradeability at Rated GVM (theoretical)\* 54% 39% Gradeability at Rated GCM (theoretical)\* 26% 26%

\*Theoretical performance only. Actual performance may vary under different conditions

KERB WEIGHTS AND MAX AXLE LOADS (kg)								
		Vehicle	Ratings**	Max Axle	Loadings**		Kerb Weights	•
Model		GVM	GCM	Front	Rear	Front	Rear	Total
4x2 FK1025 6 Sp. Man Steel Susp.	FK61FL1RFAC	10,600	20,000	3,800	7,000	2,230	1,295	3,525
4x2 FK1025 5 Sp. Auto Steel Susp.	FK61FL1RFAL	10,600	15,000	3,800	7,000	2,250	1,330	3,580


 $^{*}$  Weights (est.) includes 10L fuel and spare wheel and are subject to 2.5% variation (+/-)

<sup>\*\*</sup> Vehicle ratings and max axle loadings may be limited by local regulations.

### **SPECIFICATIONS - FIGHTER FK1025 MWB**

DIMENSIONS (mm)		
	L Wheelbase	
Wheelbase	5,210	
Length Overall	8,645	
Height Overall	2,465	
Width Overall	2,175	
Width Rear Axle	2,175	

L Wheelbase
1,810
1,665
842
863

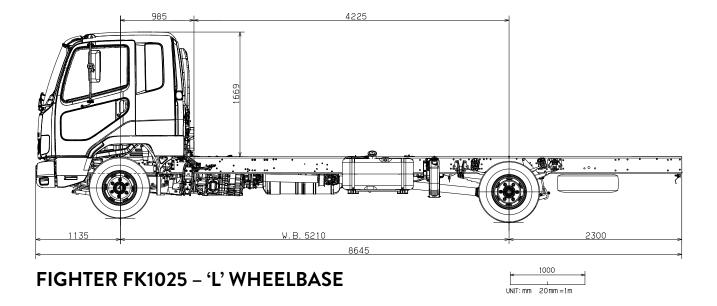

Scale = 1:50 (20mm = 1 metre). This scale is accurate when used on the original spec sheet, be aware that enlarging these illustrations can alter the scale and cause incorrect measurements. Fuso New Zealand and its authorised dealers always recommend customers seek professional advice from independent sources before commencing any engineering activities.

A policy of continual improvement means that specifications detailed in this brochure are subject to change without notice. Contact your authorised Fuso dealer to confirm current specifications. Fuso is a registered trademark of Mitsubishi Fuso Truck & Bus Corporation. Copyright © Fuso NZ (2021)

