

CANTER

716C/E 4WD

MY24
MODEL



WIDE CAB 4x4

FGB71CR6SFBG (C) FGB71ER6SFBG (E)



GVM:
6,500kg



Power / Torque:
110kW / 370Nm




Wheelbase:
2,815mm (C)
3,415mm (E)



ENGINE

Engine Version	FUSO 4P10-T4 diesel
Configuration	4 Cyl. In-line DOHC, 4-valve
Type	Variable geometry turbo charged with intercooler
Displacement	3 litre (2,998cc)
Power (DIN)	110kW @ 2840~3500rpm
Torque (DIN)	370Nm @ 1350~2840rpm
Max Engine Speed (rpm)	4100
Air Cleaner	Restrictor indicator + vertical intake on RH side
Emission Control	Diesel particulate filter with status dash display
Emission Level	EURO 5 (ADR 80/03) EEV-rated (Enhanced Environmentally-Friendly Vehicle)

4P10-T4

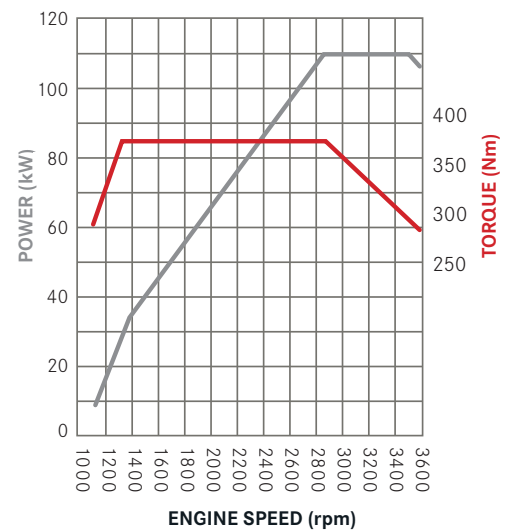

TRANSMISSION AND CLUTCH

Type	5-spd Manual
Version	FUSO M038S5
Features	In-dash gear lever
Ratios	1st: 5.494 2nd: 3.193 3rd: 1.689 4th: 1.000 5th: 0.723 Rev. 5.494
4x4 Transfer	FUSO TF3 - 2-spd
4x4 Ratios	1.987 (low) 1.09 (high)
Clutch	FUSO C4W30 direct hydraulic single dry plate
PTO Opening	LH side

KERB WEIGHTS AND MAX AXLE LOADS (KG)

Model Type	Model Code	Vehicle Ratings*		TMUB**	Max Axle Loadings*		Kerb Weights***		
		GVM†	GCM†	Total	Front	Rear	Front	Rear	Total
4x4 716C Wide Cab 5-spd MAN	FGB71CR6SFBG	6,500	10,000	750	2,800	5,760	1,765	870	2,635
4x4 716E Wide Cab 5-spd MAN	FGB71ER6SFBG	6,500	10,000	750	2,800	5,760	1,785	885	2,670

* Vehicle ratings and max axle loadings may be limited by local regulations. ** Tow mass unbraked. *** Includes 10L fuel and spare wheel; subject to 2.5% variation (+/-)

† Class 1 options available (5,995kg GVM / 9,500kg GCM)

ACTIVE SAFETY FEATURES

ABS + Electronic Brake Force Distribution (EBD)

CAB & CHASSIS SAFETY FEATURES

ECE R-29 Reinforced Cab + Side Intrusion bars

Driver Steering Wheel Airbag

Passenger Dashboard Airbag

Speed Limiter (Adjustable)

Hill Start Assist (Adjustable)

Heated Rearview Mirrors

MITSUBISHI FUSO Authorised Distributor

Fuso New Zealand Ltd

www.fuso.co.nz/range/canter

FUSO

FUEL

Injection System	Bosch common rail direct injection Bosch piezo technology injectors
Tank Type	100L steel tank with locking cap
Filtration	Filter with water separator and indicator sensor

ELECTRICAL

Voltage / Alternator	12V negative earth / 110 amp
Battery	Heavy duty 115D31L x 2
Head & Fog lamps	LED

AXLE / SUSP. / BRAKES

Front Axle	FUSO D1H full floating hypoid with constant velocity universal joints (5.285:1)
Front Axle Hubs	Free wheel manual locking type
Rear Axle	FUSO D035H full floating hypoid type with positive locking limited slip differential (LSD) (5.285:1)
Max Operating Capacity (kg)	2,800 (front) 5,760 (rear)
Suspension	Multi-leaf + double-acting shock absorbers
Brakes	Hydraulic dual circuit + front and rear drums
Park Brake	Transmission-mounted
Brake Systems	ABS + EBD + EBS + exhaust brake Brake Priority System

WHEELS AND TYRES

Wheel Size	15.0 x 5.0K-115
Tyres	215/75R17.5 Traction
Spare Tyre	Yes

INSTRUMENTS

Gauges	Speedometer with odometer, tachometer, fuel level, water temperature
Colour Information Display	Fuel consumption, DPF bar chart from 1~9 Water temperature, maintenance reminder system, date and time, tripmeters

OPTIONS

† Additional Cameras (up to 6)
Truck Specific GPS Navigation
Reversing Sensors
Tyre Pressure Monitoring System

CAB FEATURES

Cab Type	All steel forward control manual tilt
Mounting	Hydroelastic 4 point
Interior	Fully trimmed cab with vinyl floor covering
Steering Wheel	Energy-absorbing adjustable (height and reach)
Seats (3)	Heavy-duty driver's seat with arm rest and adjustable lumbar support + passenger bench + ELR 3-point seatbelts (height-adjustable + pretensioner for driver) + lap belt (centre passenger)
Storage	Dual overhead storage pockets, in-dash centre document storage, door storage pockets, lockable glove box
Doors / Windows	Keyless central locking / electric windows
Temp. Control	Air conditioner / heater / demister
Accessory Power	12V accessory power outlet / cigar lighter
Fuso FS8000 8" Multimedia Touchscreen Unit	AM/FM/DAB + USB + AUX Apple Carplay and Android Auto Wi-Fi enabled for internet radio Bluetooth; 64GB capacity storage; HD reverse camera included †

PERFORMANCE

Turning Circle (kerb to kerb - metres)	11.4 (C) 13.4 (E)
Road Speed (km/h) at Max Engine Speed	123
Engine Speed (rpm) at 90km/hr (top gear)	2660
Gradeability at Rated GVM (theoretical)*	60%
Notes	*This is theoretical performance only. Actual performance may vary under different conditions

DIMENSIONS (MM)

Wheelbase	2,815 (C) 3,415 (E)
Overall Length	5,171 (C) 5,935 (E)
Overall Height	2,670
Overall Width	2,030
Width Rear Axle	2,030
Width Front / Rear Track	1,665 / 1,560
Width Frame	750
Height Frame at Rear Axle	881

CHASSIS

Ladder Frame	192 x 60 x 6 (mm)
Tensile Strength	440MPa

Refer to the bodybuilders guidelines on www.fuso.co.nz before mounting a body or modifying the chassis

SERVICE INTERVALS / EXTENDED WARRANTY

30,000km/12mths full service intervals (depending on application).
15,000km/6mths safety inspection with greasing (to maintain warranty cover and optimum performance).

5yrs / 200,000km warranty (3yrs / 100,000km + 2yrs / 100,000km)
Have your vehicle serviced at an authorised FUSO Service Centre at the recommended servicing intervals for extended cover! Terms & conditions apply. Scan the QR code for full warranty details.

SCAN OR
CLICK HERE:

