

# FIGHTER 280



GVM	GCM	POWER	W/BASE	CODE
16,000kg	25,000kg	280ps	4,280mm	FM65FH2RFAH
12,000kg	25,000kg	280ps	4,280mm	FM65FH2RFAH


## PERFORMANCE

Maximum Speed:	100km/h
Gradeability at Rated GVM:	36.5%
Gradeability at Rated GCM:	22.0%
Turning Circle (kerb to kerb):	14.6m

## ENGINE

Mitsubishi FUSO 6M60-9AT2 Diesel (Euro V)
Configuration: 6 cyl. in-line OHC, 4-valve
Type: Turbocharged with air to air intercooler PCV & common rail fuel system SCR after-treatment system (BlueTec)
Displacement: 7,545cc
Bore: 118mm
Stroke: 115mm
Power (JIS Gross): 207kW (281ps) @ 2,500rpm
Torque (JIS Gross): 802Nm (592lb/ft) @ 1,100-2,400rpm
Maximum Engine Speed: 2,900 rpm
Compression Ratio: 16:0:1
Oil Cooler: Plate type, water cooled
Air Cleaner: Dual element cyclonic with vertical intake & air restriction indicator

## 6M60-9AT2 DIESEL ENGINE MODEL

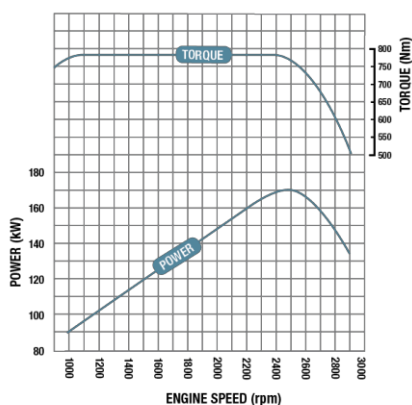

## FUEL

Injection System:	DENSO common rail system
Governor:	Electronic
Fuel Tank:	200 Litres Rectangular with Lockable Cap
Fuel Cooler:	Fitted
AdBlue Exhaust Fluid Capacity:	40 litres

## COOLING

Fan:	540mm dia. 10 blades
Fan Drive:	Thermo modulated
Radiator:	Corrugated fin with expansion tank

## ELECTRICAL

Voltage:	24V negative earth
Alternator Capacity:	24V-80 amp
Starter Capacity:	24V-5.0kW
Battery Capacity:	Heavy duty 2x12V, 100Ah/20hr
Headlamp - Type:	Quartz Halogen multi parabola
- Capacity:	Low beam 2 x 70W High beam 2 x 75W

## CLUTCH

<b>Model:</b>	<b>C7M38</b>
Disc Diameter:	380mm
Type:	Single dry plate
Operation:	Air assisted hydraulic
Facing Area:	Cerametallic - 754cm <sup>2</sup>

## TRANSMISSION

<b>Model:</b>	<b>M070S6-D</b>
No. of Speeds:	6 with air assisted gearshift
Synchromesh:	2nd-6th
1:	8.064
2:	5.443
3:	3.064
4:	1.824
5:	1.321
6:	1.000
Reverse:	7.354
PTO Opening:	LH side

## PROPELLER SHAFT

Type:	P10
Universal Joint:	Needle roller

## FRONT AXLE

<b>Model:</b>	<b>F650T</b>
Type:	Reverse Elliot 'T' beam
Design Capacity:	6,300kg
Maximum Operating Capacity:	6,300kg

## REAR AXLE

<b>Model:</b>	<b>R060T</b>
Type:	Full floating hypoid
Design Capacity:	10,200kg
Maximum Operating Capacity:	10,000kg
Ratio:	5.142:1

## STEERING

Type:	Integral power assisted - ball & nut
Steering Wheel:	Airbag
Steering Column:	Tilt/telescopic adjustable with lock

## BRAKES

Type:	Full air, dual circuit, Mitsubishi taper roller with automatic brake adjustment, EZGO hill start assist, ABS & ASR
Size:	Front: 410 x 150mm Rear: 410 x 200mm
Park Brake:	Rear wheel spring actuated
Auxiliary:	Exhaust brake
Compressor:	Water cooled, 340cc single cylinder with air dryer

## FRONT SUSPENSION

Type:	Parabolic leaf taper leaf
Size:	1,400 x 80 x 20mm - 1 leaf x 22mm - 2 leaves
Capacity at Ground:	3,665kg each
Shock Absorbers:	Double acting

## REAR SUSPENSION

Type:	Laminated Leaf
Size:	1,400 x 80 x 11mm - 10 leaves
Auxiliary:	960 x 80 x 11mm - 10 leaves
Capacity at Ground:	5,100kg

## CHASSIS

Type:	Parallel channel
Size:	280 x 90 x 8.0mm
Width:	841mm
Tensile Strength:	540Mpa



## WHEELS & TYRES

Wheel:	Type:	6 x Single piece disc
	Size:	22.5 x 8.25DC-165-13t
	Stud pattern:	10 x 335mm PCD
Tyre:	Size:	11R22.5 148/145L

## KERB WEIGHT (kg – estimated)

Front:	2,840kg
Rear:	1,870kg
Total:	4,710kg

*Includes coolant, oils, tools and 20 litres fuel.*

## CAB FEATURES

### All steel forward control

Type:	Manual tilt 44 deg
Mounting:	Hydroelastic susp 4 point
Colour:	Natural White
Interior:	Fully trimmed with vinyl floor mat
Windscreen:	Laminated tinted
Windscreen Wipers:	2 Speed + Intermittent Cycle with Integrated Washer Nozzles
Door:	90 degree opening angle
Steering Column:	Telescopic & Tilt
Rear Vision Mirrors:	Remote / heated with Convex Spotter (both sides)
Seating Capacity:	3
Seat Belts:	2 ELR lap sash, 1 lap with pre-tensioners
Seats: Driver:	ISRI air suspension with auto levelling, height, tilt and dampening adjustment Integral headrest & fabric trim
Centre:	Low back with fabric trim & forward folding
LH:	Fixed base, reclining, integral headrest & fabric trim

## STANDARD FEATURES

### Safety

- ABS
- Driver's Air Bag
- Seat Belt Pre-tensioners
- LH Transom Window
- Reverse Warning Buzzer
- Heated and remote controlled exterior mirrors
- EZGO Hill Start Assist

### Driving

- Keyless Central Locking
- Electric Windows
- Cruise Control
- 24V Accessory Power Outlet/Cigar Lighter
- Air Conditioner/Heater/Demister
- Radio/CD Player/AUX/Bluetooth/Audio Streaming
- Cup Holders (4)
- Rear Quarter Glass
- Fluorescent Cabin Lamp and Interior Reading Lamps
- Engine Idle Speed Control

### Storage

- Centre Seat Storage Console
- LH Seat Storage Tray
- Rear Bunk Storage Pocket
- Dash Storage Tray 2 DIN Glove Compartment
- 1 Single & 1 Double DIN Slot for Accessories
- Overhead Storage Pocket with Lid
- RH Door Storage Pocket

### Cab External

- Roof Mounting Points (max. static load 70kg)
- Front End-Outline Marker Lamps

### Chassis

- Tool Kit & Chassis Mounted Tool Box

## INSTRUMENTS

### Gauges:

- Speedo with Odometer
- Tachometer
- Air pressure (2)
- Fuel level & urea level
- Water temperature

### Colour Information Display:

- Fuel consumption
- Service indicators
- Hour meter and tripmeter


### Warning Lamps:

- Glow plug indicator
- ABS
- Turn signal
- High beam
- Exhaust brake
- Oil level
- AdBlue low
- Fuel low
- Park brake
- Alternator
- Oil filter blockage
- Engine control/cruise control (ECU)
- Air filter restriction
- Door opening
- Cab tilt lock

### Warning Lamp/Buzzer:

- Air pressure
- Oil pressure
- Engine overheat/low coolant level

10.5 Chassis cab drawings

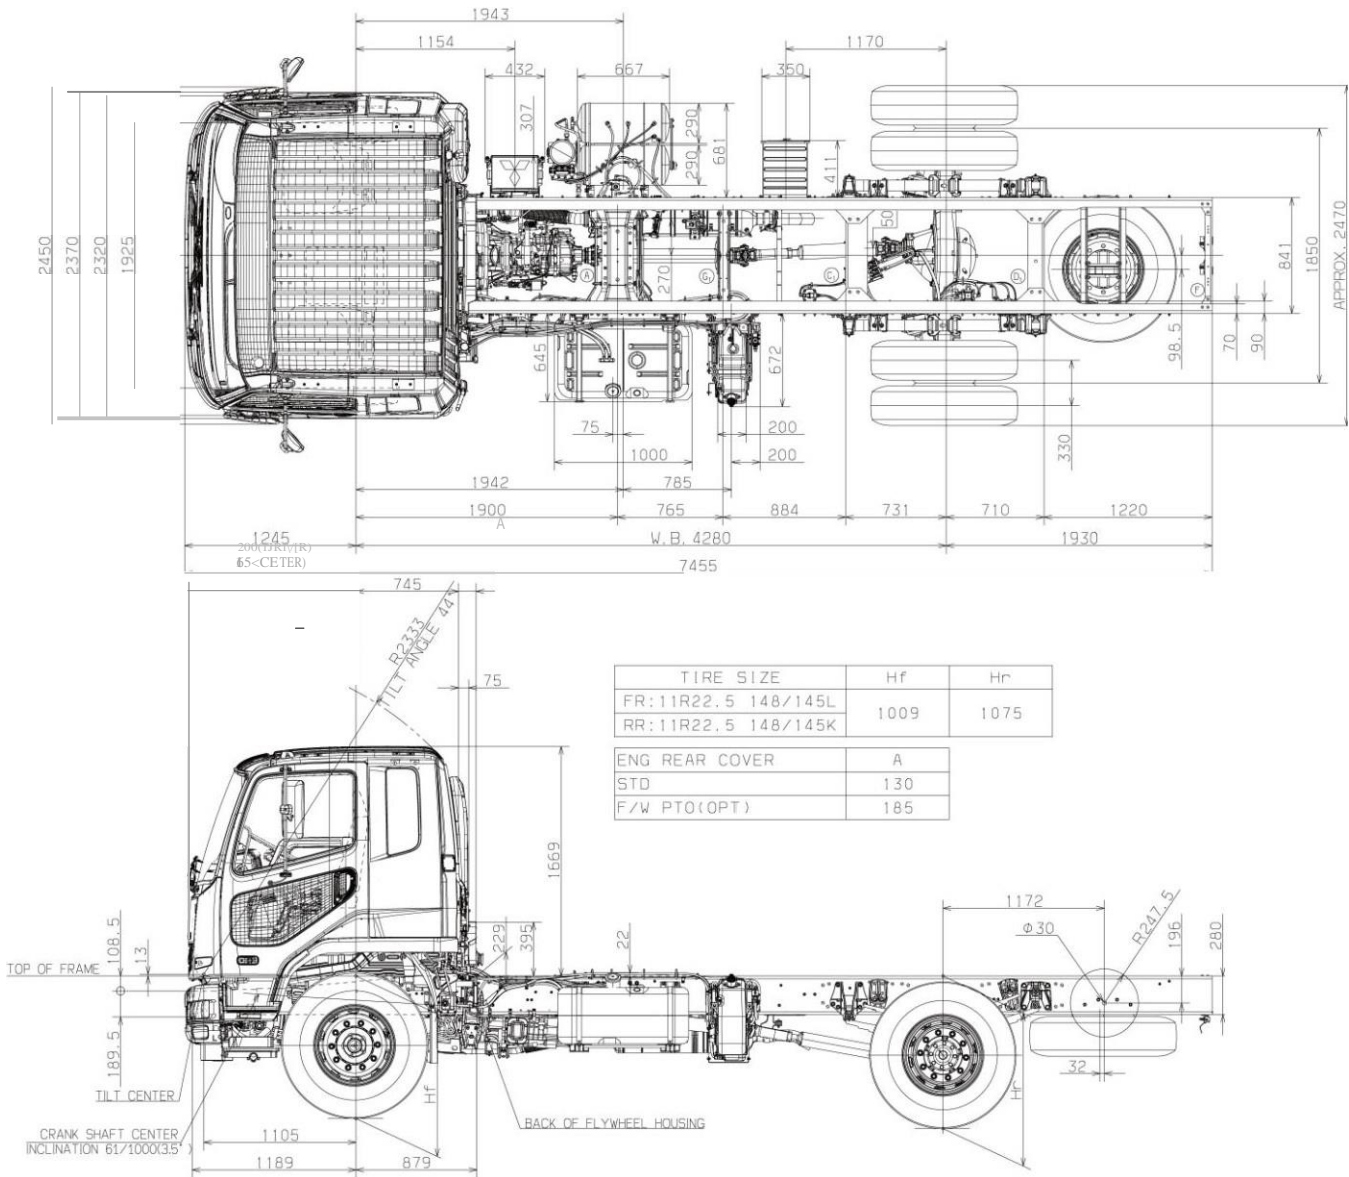

NOTE. FOR THE II-TAILS OF CROSSMEMBERS.  
SEE "II-TAILS OF CROSSMEMBERS" •

UNIT : mm  
SCALE : 1/40